

Anaerobic Reactor for Indonesian Tofu Wastewater Treatment

Sanggono Adisasmito^{1*}, Carolus Borromeus Rasrendra¹, Hengky Chandra¹, and
Mohammad Adimas Gunartono¹

¹Chemical Engineering Department, Institut Teknologi Bandung, Bandung 40132, Indonesia

*Corresponding author E-mail: sanggono@che.itb.ac.id

Abstract

An Upflow Anaerobic Sludge Blanket (UASB) reactor was used to process liquid wastes from a tofu industry with COD (Chemical Oxygen Demand) 7619 mg/L, pH 4, and TSS (Total Suspended Solid) 1035 mg/L. This work is part of efforts to clean Citarum River in West Java, Indonesia, named as Citarum Harum national program. The liquid Hydraulic Retention Time (HRT) in the reactor was varied from 2, 3, 4, and 5 days and the resulting COD outputs were 6783 mg/L, 6494 mg/L, 5806 mg/L, and 4722 mg/L respectively. The results represented up to 38% in COD reduction. Biogas was produced from the UASB Reactor with the maximum production rate of 1.56 mL/min. The composition of the biogas was methane (56.4% -mole), carbon dioxide (42.7% -mole), and impurities (0.9% -mole) with the Lower Heating Value (LHV) of 20.2 MJ/Nm³.

Keywords: Biogas, Citarum Harum, HRT, Tofu Wastewater, UASB Reactor.

1. Introduction

Indonesia has more than 84,000 units of tofu industries with production capacity of more than 2.56 million tons per year. Tofu liquid waste contains Chemical Oxygen Demand (COD) of 5000-8000 mg/L and Total Suspended Solid (TSS) of more than 1000 mg/L. For every 1 kg of soybeans processed into tofu, liquid waste can be produced up to 40-43 times larger (Indriyati and Susanto, 2012). Anaerobic decomposition is one of the alternatives to reduce COD and to produce biogas. In Indonesia, tofu industries are still disposing the untreated liquid wastes due to the relatively high processing costs. Waste treatments need to be improved to obtain affordable cost for tofu industries. Liquid wastes generated from the tofu industries around City of Bandung, West Java Province, ultimately end in Citarum River. The Government of Indonesia established Citarum Harum national program as one of the efforts to clean Citarum River, by reducing the wastewater disposal to the river.

The high capital cost of anaerobic tofu liquid waste treatment is caused by high reactor volume needed for the treatment process. Upflow Anaerobic Sludge Blanket (UASB) reactor could be used for the anaerobic processing of tofu liquid waste into biogas with the amount of 0.13 L/g COD with the retention time of 4 days. In a regular process, it requires a minimum of 12 days to remove 95% of the COD to reach the COD of 300 mg/L (Wagiman, 2007). Thus, retention time with wider range has to be investigated. The purpose of this research was to determine the Hydraulic Retention Time (HRT) using UASB reactor for COD reduction and biogas production.

2. Experimental Procedures

Tofu liquid waste was obtained from a tofu producer in City of Bandung, as a by-product of tofu clotting process. The characteristics of the tofu liquid waste are listed in Table 1.

Table 1: Characteristics of tofu liquid waste

No	Parameters	Value	Unit
1	COD	7,619	mg/L
2	TSS	1,035	mg/L
3	pH	4	-

The UASB reactor was made from polyvinyl chloride (PVC), with the operational liquid capacity of 33.7 L, as seen in Figure 1. Tofu liquid waste was introduced into the reactor, with a fed batch system, every 24 hours, through the Feed Inlet (I). The Hydraulic Retention Time (HRT) of the liquid inside the reactor was varied from 2, 3, 4, and 5 days.

Liquid samples were withdrawn from the Effluent Valve (E) for COD concentration measurements using UV-VIS Spectrophotometric method (wavelength 420 nm). In compliance with the Indonesian SNI Standard Number 06-6989.2-2004, the liquid samples were diluted 50 times for COD measurements. The liquid TSS was measured using Indonesian SNI Standard Number 06-6989.3-2004. The liquid pH was determined using pH test paper. The biogas was withdrawn from Gas Valve (B) and the biogas production was measured using a graduated cylinder, filled with water inside a beaker glass. The duration of measurements was 15 minutes and the volume changes of the water column were recorded. The compositions of biogas were analyzed using a Gas Chromatography (Model Shimadzu GC-2014) equipped with a Thermal Conductivity Detector (TCD). The Lower Heating Value (LHV) of the biogas was calculated by averaging the calorific values of the gas components.

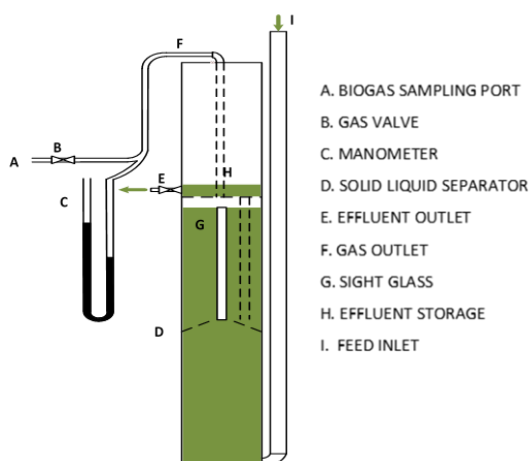


Fig. 1: Upflow Anaerobic Sludge Blanket (UASB) Reactor

3. Result and Discussion

3.1. Effect of HRT on Biogas Production Rate

For different sets of Hydraulic Retention Times, the biogas production rates were measured every 15 minutes. The results are shown in Figure 2.

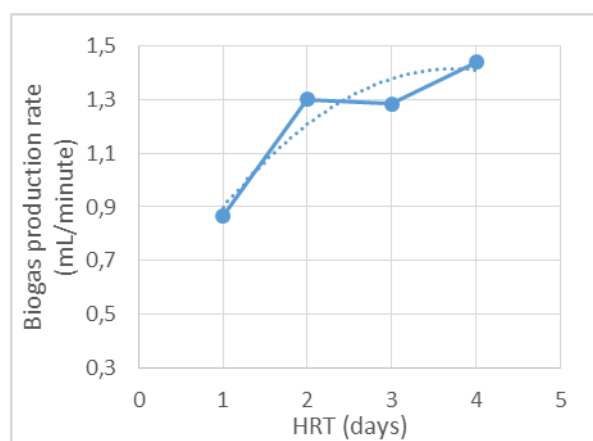


Fig. 2: Daily production rates of biogas with HRT of 4 days

The production rates of the biogas showed higher value every day. However, on the last day of the HRT, gas production showed less significant change and started to enter equilibrium. This indicated that the cycle from the HRT variation of 4 days had been completed and ready for the characterization and measurement of the biogas production rate. Therefore, data distribution of the biogas production rate on the last day of each HRT variations was conducted to see the effect of HRT on biogas production rate. The result showed in Figure 3.

The biogas production rate on the variations of HRT 2, 3, 4, and 5 days respectively were 0.69, 1.33, 1.44, and 1.56 mL/min. Figure 2 shows that the biogas production rate increased as the HRT increased from 2 days to 5 days. This phenomenon happened because in the low HRT, methanogenic microorganisms flushed out before reaching the maximum productivity. To avoid microorganism flushing, Deublein et al (2010) suggested that the HRT is adjusted between the ranges of 10-15 days. However, Wagiman (2007) reported that biogas production rate in a UASB batch system with the retention time 2, 3, and 4 days were 2.0, 0.7, and 0.4 mL/min respectively. The decrease of biogas production was because the organic contents from feed in batch system from day to day would start to reduce as there were not feeding inlet and flush out effect by the feed as in the intermittent feeding system.

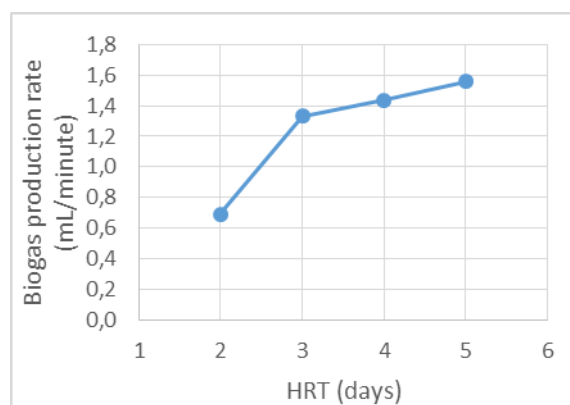


Fig. 3: Biogas production rate on the last day of each HRT variations

Biogas production which is relatively similar to the bigger operation capacity of the reactor to the research by Wagiman (2007) indicated that biogas production was still not optimum. The reactor output in Wagiman's research (2007) had a pH value 7. This indicates that in neutral pH, biogas production would be better. Sorathia et al. (2012) reported that the ideal pH for anaerobic process, especially for methane formation is between 7 -8. Therefore, it was necessary to increase the pH of the reactor feed in order to increase the biogas production.

3.2. Effect of HRT on Decomposition of Organic Contents

COD concentration in each of the HRT variation and initial feed (considered as HRT 0 day), was measured to observe the reduction of organic contents. COD concentration in each HRT variation is shown in Figure 4. COD concentration in feed, HRT samples of 2, 3, 4, and 5 days respectively were 7,619 mg/L, 6,783 mg/L, 6,493 mg/L, 5,806 mg/L, and 4,721 mg/L. The calculation of COD reduction percentage is done by data in Figure 4. The results are shown in Figure 5.

COD reduction in HRT 2, 3, 4, and 5 days respectively were 11.0%, 14.8%, 23.8%, and 38.0%. Therefore, it could be reported that in the range of HRT in this research, COD reduction always increased proportional to HRT. Research conducted by Wagiman (2007) reported COD reduction reached 85% on day 4. The considerable difference was due to the process done by Wagiman using batch feeding system so that the waste had longer retention time in the reactor and the decomposition of organic content lasted longer without any effect of flushed out by feeding inlet.

From the biogas production data, it was found that the volume of biogas produced per unit mass of reduced COD had an average value of 0.12 L/g COD reduction. The value was relatively similar from the results of Wagiman (2007), where it showed biogas production of 0.13 L/g COD reduction. However, this value is still lower than the result by Oktiana et al. (2015) which used the feed of mixed green algae *Ulva sp.* with water (ratio 1:2) and produced biogas 0,33 L/g COD reduction. The feedstock had C/N ratio of 20.46. Sorathia et al. (2012) reported that the feedstock was good for anaerobic decomposition. Tofu liquid waste had C/N ratio of 5.19 (Rahmat et al, 2014). Therefore, biogas production rate per unit mass of COD reduced from tofu liquid waste could be increased by mixing it with other organic wastes with high C/N ratio. The composition of biogas was analyzed with gas chromatography. The biogas composition is summarized in Table 2. The results of biogas characteristics were in accordance with the general characteristics of biogas. The biogas had two main components, methane and carbon dioxide with fewer impurities (Deublein et al., 2010). The impurities were still not identified, in the form of hydrogen, nitrogen, and hydrogen sulfide. Based on the composition, the lower heating value of biogas was 20.2 MJ/Nm³.

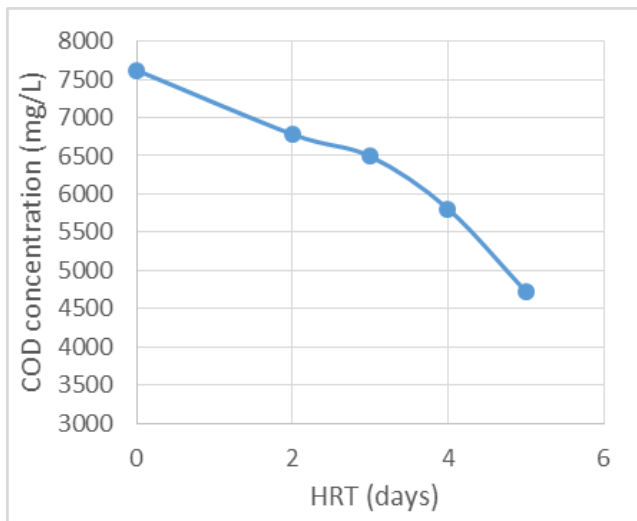


Fig. 4: COD concentration in output samples of each HRT variations

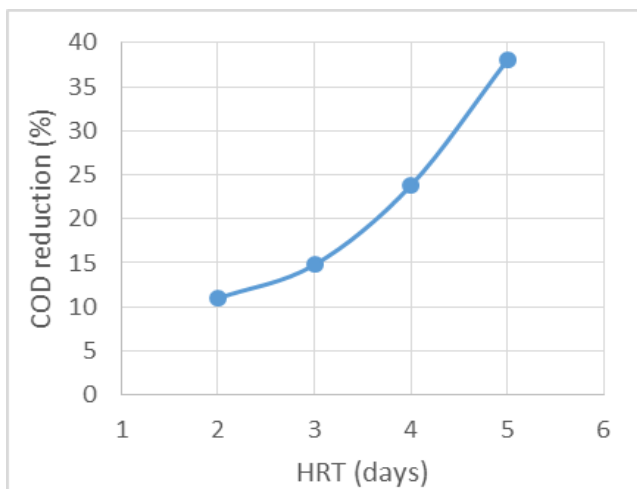


Fig. 5: COD reduction of each HRT variations

Table 2: Biogas composition

Composition	Concentration (%-mole)
Methane	56.4
Carbon dioxide	42.7
Impurities	0.9

4. Conclusion

The anaerobic decomposition process conducted by using UASB reactor with tofu liquid waste as feedstock had initial COD concentration of 7,619 mg/L, pH 4, and TSS 1,035 mg/L. Biogas production rates with the liquid HRT of 2, 3, 4, and 5 days were 0.69, 1.33, 1.44, 1.56 mL/min respectively. The composition of biogas was methane (56.4% -mole), carbon dioxide (42.7% -mole), and impurities (0.9% -mole) with the Lower Heating Value (LHV) of 20.2 MJ/Nm³. The liquid effluent COD concentration with the liquid HRT of 2, 3, 4, and 5 days were 6,783; 6,493; 5,806; and 4,721 mg/L, representing COD reduction of 11.0, 14.8, 23.8, and 38.0% -mass.

Acknowledgement

We acknowledge the gracious assistance from Andrias Wiji, the owner of PT. Cipta Tani Lestari, for his continuous support on the UASB reactor design.

References

- [1] Deublein, D. and Steinhauser, A. "Biogas from waste and renewable resources." 2nd Ed., Wiley-VCH Verlag GmbH & Co., Weinheim, 2010.
- [2] Herout M., Malatak, J., Kucera, L., and Dlabaja, T. "Biogas composition depending on the type of plant biomass used." *Czech University of Life Sciences Prague, Res. Agr. Eng.* Vol. 57 (2011) No.4: 137-143.
- [3] Indriyati dan Susanto, J.P. "Biological processing performance of tofu liquid wastes". *Jurnal Teknologi Lingkungan* Volume 13 (2012) No.2, 159-166. ISSN: 1441-318X (in Indonesian)
- [4] Oktiana, T.D., Santoso, J., and Kawaroe, M. "Green Algae (*Ulva Sp.*) as feedstock for biogas production." *Jurnal Ilmu dan Teknologi Kelautan Tropis*, Vol. 7 (2015), No. 1, 191-203 (in Indonesian)
- [5] Rahmat, Budy, Tedy Hartoyo, dan Yaya Sunarya. 2014. "Biogas production from tofu liquid waste on treated agricultural wastes." *American Journal of Agricultural and Biological Sciences*. 9 (2): 226-231. ISSN: 1557-4989.
- [6] Sorathia, Harilal S.; Dr. Pravin P. Rathod; Arvind S. Sorathiya. 2012. "Biogas generation and factors affecting the biogas generation." *Gujarat IJAET* E-ISSN 0976-3945.
- [7] Wagiman. "Biogas production from tofu liquid wastes using Upflow Anaerobic Sludge Blanket (UASB) Reactors." *UGM Bioteknologi* 4 (2007) No.2: 41-45, ISSN: 0216-6887, DOI:10.13057 (in Indonesian)