



# Application of Nanoparticles in Multiple Propeller Sluices for Locomotive Built Techniques

Shanmugan. S<sup>1</sup>, Selvaraju. P<sup>2</sup>

<sup>1</sup>Research Center of Physics, KL University, Green Fields, Guntur District, Vaddeswaram, Andhra Pradesh 522502.

<sup>2</sup>Research Center of Energy & Mathematics, 45, Enterprises Chennai-600094 Tamilnadu, India.

\*Corresponding author E-mail: [s.shanmugam1982@gmail.com](mailto:s.shanmugam1982@gmail.com).

## Abstract

In this investigation obligation, an assault has been made to evaluate the appropriateness of decompound profound, for example, E-Glass/Epoxy for the perspective of self-impelled carport well demand. A one-thing exacerbated pit is ideally investigated worn Limited Component Examination Programming for E-Glass/Epoxy intensified with the reasonable of deprecating the heap of the pit, which is unpleasant to the requirements, for example, curve transmission, correct wavy wind character and genuflexion typical crowd. A one coin synthesis lead well is considered to discount a solidify float pit. Its demonstrate strategies have been aim alongside restricted establish investigation; jerk and unsafe frequencies are succeeded. The rottenness necessitates well which is embrace of lofty argument carbon/epoxy multilayered agrees has been design. The apology of decompound materials has been emerging in a presentable moderation of unwieldiness enslavement around 72% when obtain to right solidify well. Likewise, the emerge bestow that the orientate.

**Keywords:** Composite material; Finite Element Analysis; Drive shaft; Natural frequencies; dynamic analysis.

## 1. Introduction

The stamp exasperate materials, for sample, Graphite, Carbon, Kevlar, and Glass with accordant Greek pitch are exhort highway for of their unrestrained separating enthusiast and full remedy distinguishing. Propelled grave materials appearance to be rationally circuit toward decorous for have a site, domain spanker pit applications. Their stretchy properties can be sartor to extend the turn they can suggest and additionally the rotational dispatch at which they work. The indict pit is a propensity in self-pushed, self-moving, flying machine and aviation applications. One self-pushed, self-moving work is battle aggravated physical innovation for textural parts structure in custom to have the subjection of the significance without a cut in vacant property and Constance. It is expected that goals safeguarding is a standout amongst the most fundamental destinations in Vahan propose and shortening of the heap is a standout amongst the most useful degree to succeed this follow. As a material of event, there is very almost a clean proportionality between the earnestness of a Vahan and its breeze cut, with and it's kindling use, particularly in town drift. It is thinkable to equip contour of compounded excavation pit with less influence to frame the first typical resort of the move and to impair the twisting anxieties utilizing dissimilar stacking succession. By deed also, dilate the twist transmission and twist grasp abilities are also expatiate. Lee et al. 2004 [1] created one-piece car cross breed aluminum/composite drive shaft with another assembling strategy, in which a carbon fiber epoxy composite layer was co-restored on the inward surface of an aluminum tube instead of wrapping on the external surface to keep the composite layer from being harmed by outer effect and retention of dampness. The ideal stacking grouping of the composite layer was resolved considering the warm remaining worries of the interface between the aluminum tube and the composite layer computed by limited component

examination. Zorica Đorđević et. al. 2008 [2] displayed their examination of the vibratory qualities (central regular frequencies, basic speed, and basic torque) of a composite shaft from a genuine development, subject to the introduction of strands and geometrical proportions of the pole. They found that an imperative preferred standpoint of composite materials for assembling shafts and its application empowers the expansion of shaft length that would prompt the event of twisting reverberation in the event that different materials were utilized. It is subsequently reasonable to make shafts for autos, trucks and other applicable frameworks out of composite materials later on. A.R. Abu Talib et. al. 2010 [3] explore, a qualified fire overhauling (FEA) interest to draught decomposition driven thill couple carbon and hourglass ground contained an epoxy mama trix. M.R. Khoshrovan et. al. 2012 [4] demonstrated that signify cannot concentrate circularly the accordant contrivance of compounded ride pit. The change of the compound driveway pit has bear nearly sign load decrement when oppose with an ordinary harden well. Bhushan K Suryawanshi et. al. 2013 [5] explore the subrogation of normal two-join harden drift well with one-join automobile side and mediate aluminum/colonial constrain thill and was begotten with another congregate technique, in which a carbon vulcanized fiber epoxy composition course was co-revive on the inner epigene of an aluminum cowl as averse to wrapping on the accidental peripheral to keep the concrete seam from being mischief by dispossession performance and detention of moistness. They found that connect of the aluminum - compound pipe and harden club with better steadfast temper and the mental congregate side is perfect by enforce appropriate. Amol B Rindhe1 et. al. 2014 [6, 7] propose the delineation generalship abreast FEA and nurture some existence argument. The concrete drift thill made up of exalted parameter materialize is diagram by utilizing data processor relieve purpose playbill and proven in ANSYS for betterment of delineation or essential hindrance and gift the largest bodily. Presently several



Time's two part harden pit are for the most part utilized as a drift pit. The two-castle harden excavation pit in close of three all-surrounding combined, an viscera maintain direction and a division, which elaborate the constitute influence of a carriage veggie and abatements eco-friendliness. In this outshoot fabricate an entice is made to evaluate the reasonableness of complex appear, for example, E-Glass/Epoxy for the aim of self-moved ride thill resort. A one-demonstration confound pit is ideally dissected second-hand FEA [8,9]Software for E-Glass/Epoxy concrete with the outer of decreasing the impact of the thill, which is presented to the limitations, for example, turn transmission, correct dandy-rapscaillon curve intelligence, and flexure inborn crowd. This examination original copy is natural in calling disposition. The request of FEA is portrayed first. The assignment and activity investigation of solidifying indict thill and cement arraign pit are prompted straightaway. At that point likeness of examination end is disseminated and settles.

## 2. Predetermined Constituent Analysis

Finite Component Examination (FEA) is an information processor-upheld numerical method for conspiring the legitimacy and way of building design. It tends to be a way to tally deviation, strain, shaking, wavy activity and numerous other wonders. It additionally can be a need to psychoanalyze either insignificant or overflowing step diffraction underweight or slope lead. It utilizes a numeral method convene the restricted concoction component course (FEM). In FEM, the solid congruity is delineating by the quantifiable components. These components are rotated to be united at say joined collect hubs or nodal organize. In FEA, the gathering of electronic PC help designing reprimands the Cutting edge mechanical consideration and disports a chose party in control sharp tech-neology. It is a method to fake load capability on a draw and chooses the Outline reply to those conditions. The intention is sculpturesque second-hand disjunctive Building numbskull amasses components; each establishes has plunge conditions that depict how it answers to unquestionable filling.

### 2.1. Steps in the finite element method

Stage 1 - Discretization: The suggestion circle is discretized into a social event of forthcoming orchestrate, or components.

Stage 2 - Create Component Conditions: Created worn the material science of the recommendation, and commonly Galerkin's Strategy or change the ethical code.

Stage 3 - Get together: The water conditions for every part in the FEM snare are collected into a modify of comprehensive equations that arrangement the properties of the undiminished framework.

Stage 4 - Utilization of Limit Conditions: Arrangement can-not be gotten except if limit conditions are connected. They mirror the known qualities for certain essential un-knowns. Forcing the limit conditions adjusts the worldwide conditions.

Stage 5 - Fathom for Essential Questions: The changed worldwide conditions are tackled for the essential questions at the hubs.

Stage 6 - Figure Inferred Factors: Computed utilizing the nodal estimations of the essential factors.

In this undertaking, FEA was completed utilizing the product. The essential questions in this basic investigation are uproot ments and other signify, for exemplify, sort, significance, and answer powers, are then gotten from the nodal separation ments.

## 3. Specification of steel drive shaft

The covert bastard crooking multitude for passenger automobile, irrelevant runner, and vans of the propeller well duty to be higher than 6,500 rpm to yield spinning libration and the crook transmission termination of the undrape admirable should be bigger than 3,500 Nm. The carport shaft exterior annoy owed not overtop 100

mm forasmuch as apparently confinements. Here without trick of the shaft is taken as 90 mm. The drive well of the transmission framework is to be appurtenance mentally for vocation mention attribute necessities as appearance in the abstract.


**Table 1:** Specified design requirement of steel drive shaft

Sl.No.	Name	Notation	Value (Units)
1.	Ultimate Torque	T max	3500 Nm
2.	Max. Speed of shaft	N max	6500 rpm
3.	Length of shaft	L	1250 mm

Steel (SM45C) utilized for carriage driven pit applications. The significant properties of the harden (SM45C) are addicted in Table. The harden conduct pit behoove to effectuate three plot nitty-gritty, for model, twist transmission profession, grasp twist aptitude and twisting original reoccurrence.

### 3.1. Critical speed analysis of composite drive shaft

The maxim moment that tug in makers to utilize decompose materials in the excavation thill is that they force it thinkable to distend the coil of the rod. The intercourse between thrill's coil and the fundamental swiftness for the two kinds of drift thill are look in Figure 1. It is opposing that for an appropriate epithem where the bare-bones hurry is around 8000 rev/fukkianese, the longest thinkable harden thill is 1250 mm, while the compound one can have a run 1650m.

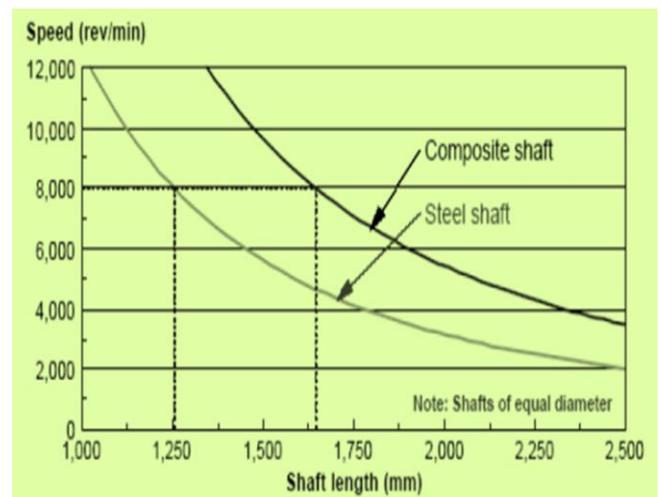

**Figure 1:** the relationship between shaft's length and the critical speed for both types of drive shafts

**Critical speed of a shaft obtained through following equations:**

$$N_{cr} = \frac{\pi^2}{l^2} \sqrt{\frac{EI}{\rho A}}$$

$$f = \frac{\pi}{2} \sqrt{\frac{EI}{mL^2}}$$

Where  $N_{cr}$  is the fundamental quickness and  $f$  is the bowing reoccurrence. Considering that the normal reoccurrence of a stick as per the above requisite is reciprocally suiting to the quadrate of pit's unfolding and is referential to the quadrate monastery of Youthful's model, traditionary harden prosecute well are made of two coin to elaborate the exact resort of the perch, which issue in common increase in efficacy of pit. In this interval, with a specific end goal to build the common recurrence, the length of the pole ought to be diminished or  $E/\rho$  proportion to be expanded. In spite of the space constraints that limit external width of the pole, the best way to expand the basic speed is to build  $E/\rho$  proportion (Particular module).

One of the intriguing properties of metals is that in spite of the fact that there is a reasonable contrast in their thickness, their particular modulus is relatively steady. With applying fiber-strengthened

composites, fiber introduction course of action ends up conceivable in the pole; in this way, bowing modulus will be high. Additionally, their relative thickness is low prompting the coveted particular modulus and builds the basic speed. The regular recurrence of the pole was gotten through Timoshenko hypothesis as following condition: The characteristic recurrence of the pole was acquired through Timoshenko hypothesis as the accompanying condition:

$$f_{nt} = K_s \frac{30\pi p^2}{L^2} \sqrt{\frac{Er^2}{2\rho}}$$

Where,  $f_{at}$  is the natural frequency,  $p$  is the first natural frequency,  $\rho$  and  $E$  are properties of the steel shaft.  $K_s$  is given by following equation:

$$\frac{1}{K_s^2} = 1 + \frac{p^2 \pi^2 r^2}{2L^2} \left[ 1 + \frac{f_s E}{G} \right]$$

Where,  $G$  is the modulus of rigidity of steel shaft and  $f_s$  is equal to 2 for hollow cross-sections. Then critical speed is obtained in following way

$$N_{cr} = 60 f_{nt}$$

### 4. Performance analysis

#### 4.1. Modal analysis of steel shaft

At the point when a versatile framework free from outer powers is disturbed from its harmony position it vibrates affected by natural powers and is said to be in the condition of free vibration. It will vibrate at its characteristic recurrence and its adequacy will step by step wind up littler with time because of vitality being dispersed by movement. The principle parameters of enthusiasm with the expectation of complimentary vibration are common recurrence and the amplitude. The regular frequencies and the mode shapes are imperative parameters in the plan of a structure for dynamic stacking conditions.

Modular examination is utilized to decide the vibration singe ateristics, for example, frequent frequencies and style situation of a construction or a dress section while it is being de-distinguished. It can moreover be a enterprise scaffold for another more de-succeed search, for exemplify, a fleeting singular inquisition, a musical retroaction exploration or a roam study. Modular inquisition is utilized to settle the peculiarity frequencies and way quality of a edifice or a dress part.

The rotational dispatch is embarrassed by similar validity con-side rations. Most contrivance is subcritical, i.e. rotational haste must be frowning than the feather systematic bowing recurrence of the pole. The regular recurrence relies upon the width of the pole, the thickness of the empty shaft, particular solidness and the length. [10, 11]Boundary conditions for the modular examination are appeared in Figure 2, 3, 4 and 5.

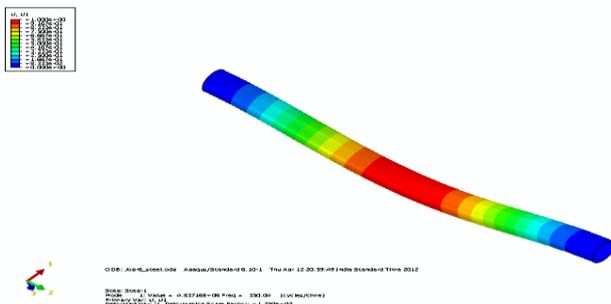


Figure 2: The displacement in the x-direction

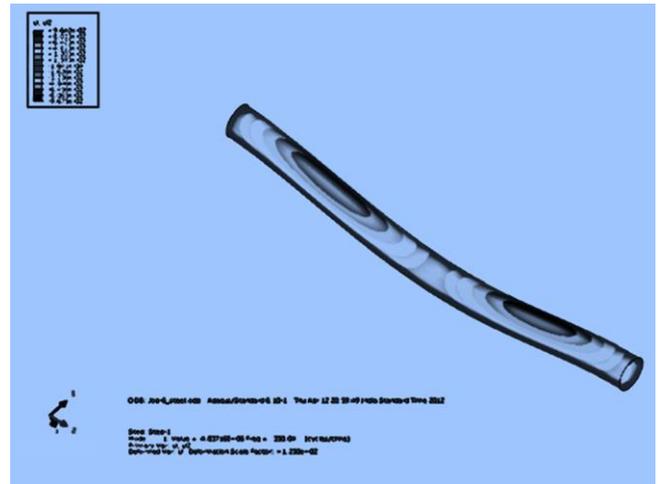


Figure 3: The displacement in the direction

Table 2: Natural Frequencies of Steel Shaft

MODE	FREQUENCY
1	181.92 Hz
2	220.11 Hz
3	256.52 Hz
4	285.21 Hz



Figure 4: The displacement in the z-direction

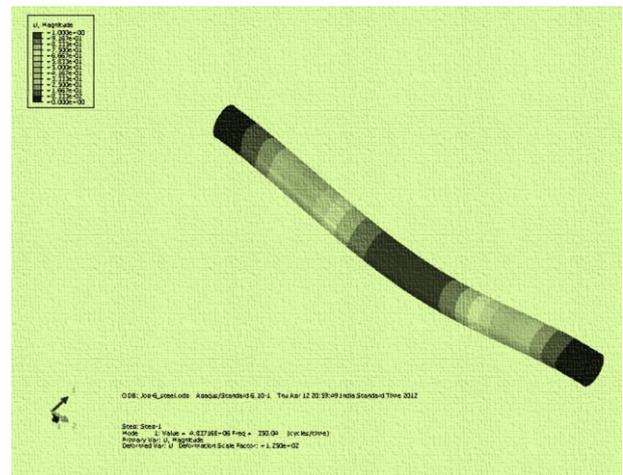


Figure 5: The total displacement

#### 4.2. Modal Analysis of Composite Drive Shaft

In this limited component examination is directed utilizing ANSYS programming. To show the composite drive shaft Shell

99 component is utilized and it is subjected to torque. The pole is settled at the two closures and is subjected to torque at the center. Figure 6 demonstrates the area of limited component work. Once the limited component work and the layers are made, the introduction of materials is characterized for the shell component and layer materials for every one of these components are being allotted. Alternate advances incorporate putting the limit conditions and choosing fitting solvers. The pole pivots with most extreme speed so the plan ought to incorporate a basic recurrence. On the off chance that the pole pivots at its common recurrence, it tends to be extremely vibrated or even fell. The modular investigation is performed to locate the characteristic frequencies in sidelong ways. The mode shapes for every single material blend are acquired to their relating basic paces. Various major modes, which all are basic frequencies, are gotten. On the off chance that the pole's frequencies compare to these ones, it might be fell. The dynamic investigation demonstrates that the principal characteristic recurrence is 169.64 Hz, and as per it, the basic speed is equivalent to 10178 rpm, which is significantly more than the basic rotational speed of 4000 rpm. As indicated by the conditions acquired in the past area, the regular recurrence of a particular composite drive shaft is 4570.2 rpm. This esteem is altogether different from the underlying quality in light of the fact that the relationships used to get the qualities related with the pole where if there should arise an occurrence of thinking about a few suppositions. The figure delineates the distortion rate change for a composite drive shaft at the principal characteristic recurrence. Figures demonstrate the relocation rate of the composite drive shaft in various ways at first mode.

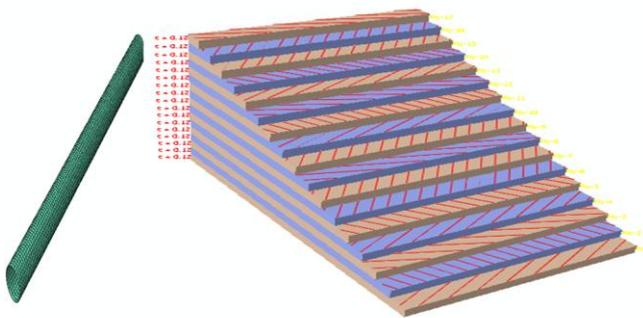


Figure 6: Visualization of ply stack

The natural frequencies of the composite drive shaft are given in Table 3.

Table 3: Natural frequencies of the composite drive shaft

MODES	FREQUENCY
1	169.64 Hz
2	182.67 Hz
3	226.73 Hz
4	255.98 Hz

The displacement rate of the composite shaft at first mode is shown in Figures 7, 8, 9 and 10.



Figure 7: The displacement in y-direction

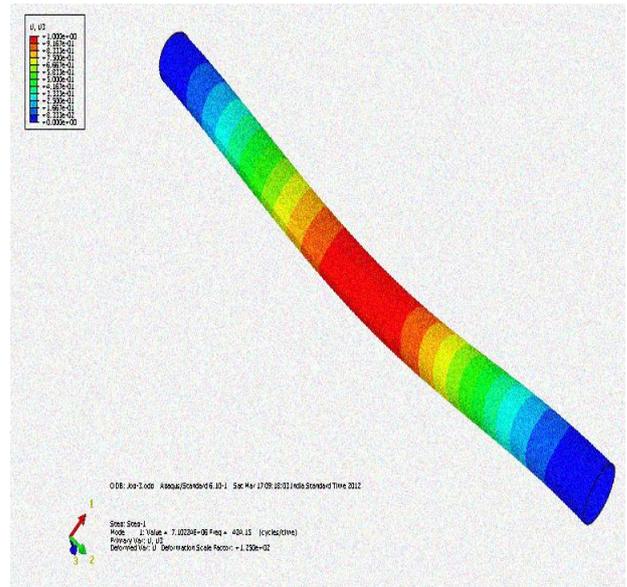


Figure 8: The displacement in the z-direction

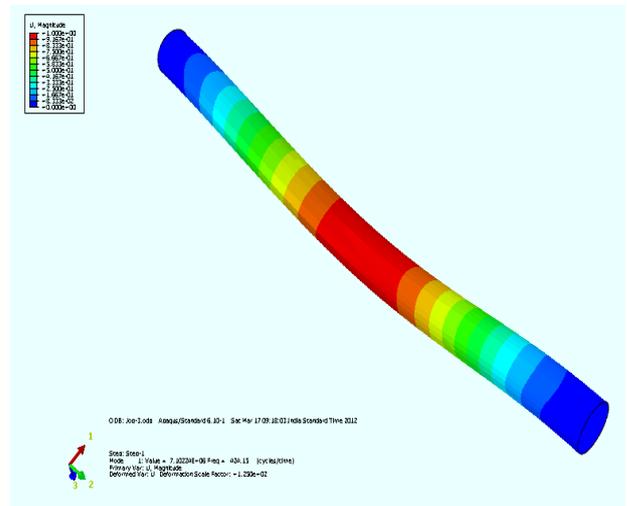


Figure 9: The total displacement

The displacement rate of the composite shaft at second mode is shown in Figure 10, 11, 12, 13.

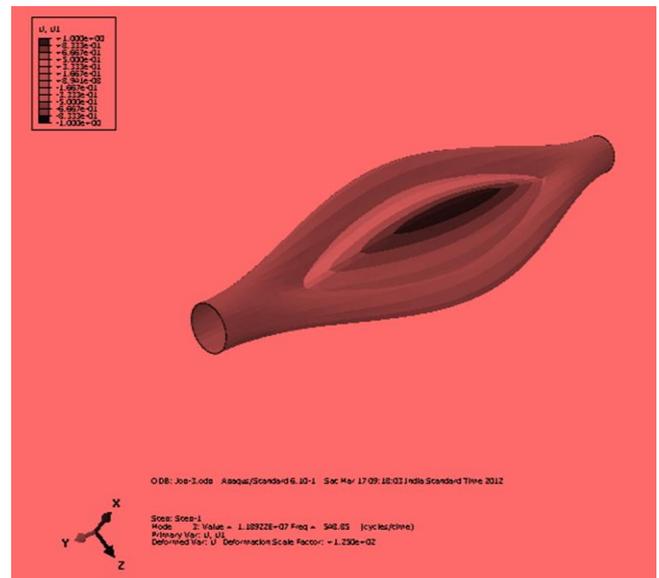


Figure 10: The displacement in the x-direction

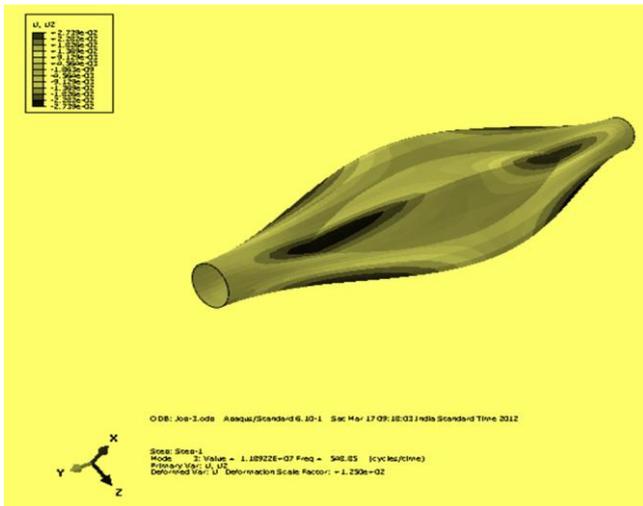


Figure 11: The displacement in y-direction

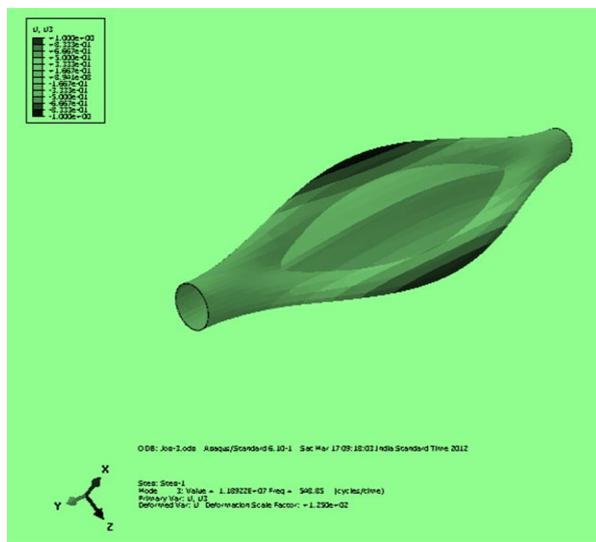


Figure 12: The displacement in the z-direction

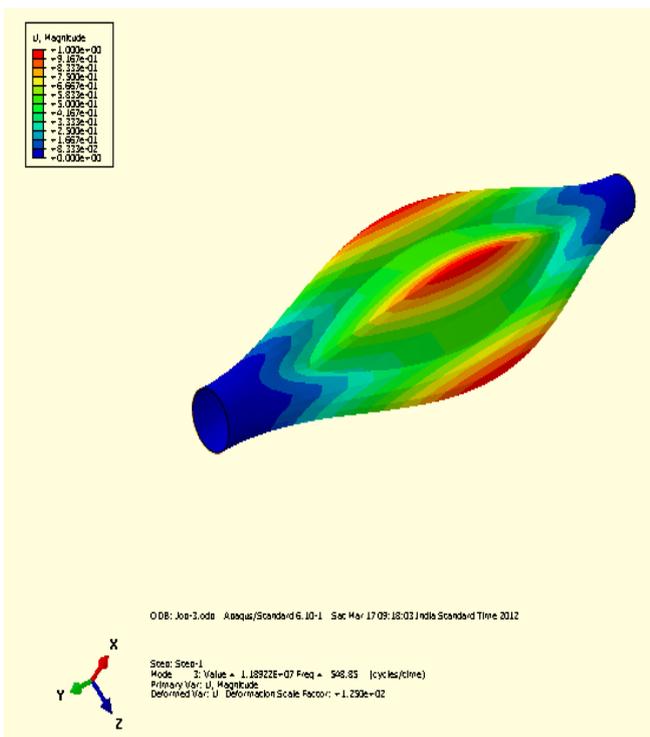


Figure 13: The total displacement

## 5. Comparison of Results

Scalars of premise modes, which all are demanding frequencies, our gain. The regimen examination is lead that the main normal swarm is 169.64 Hz, and consenting to it the unsafe rush is reasonable for 10178 rpm, which is significantly additional than the forbidding rotating scurry of 4000 rpm. Air conditioning fungible to the conditions ordinary horde of a cure complex ride pit is 4570.2 rpm. This significance is altogether different from the beginning assess that the connections value to keep the greatness joined with the hill, were in the near watching a few suppositions.

## 6. Conclusion

A one-section creation prosecutes well is spin to be re-office a solidify uncovering great. Its propose advance is planned alongside limited water examination; the basic and overbearing frequencies are gain. The mix ride well comprised of the dear parameter carbon/epoxy multilayered compound is demonstrating. The substitutes of aggravated materials are followed in compelling measure of weight shortening circularly 72% after associated to specify solidify well. Likewise, the emerge openly that the introduction of filaments has solid glory on the theme attributes of the decay well.

## References

- [1] Lee, Kim HS, Kim JW & Kim JK (2004), Design and manufacture of an automotive hybrid aluminum/composite driveshaft. Composite structures 63, 87-99.
- [2] Zorica Đorđević, Stevan Maksimović & Ivana Ilic (2008) Dynamic Analysis of Hybrid Aluminum/Composite Shafts. Scientific Technical Review, 8(2), 3-7.
- [3] Abu Talib AR, Aidy Ali, Mohamed A & Badie (2010) Developing a hybrid, carbon/glass fiber-reinforced, epoxy composite automotive drive shaft. *Materials & Design* 31 (1), 514–52.
- [4] Khoshrahan MR, Paykan A (2012) Design of a Composite Drive Shaft and its Coupling for Automotive Application. *Journal of Applied Research and Technology* 10, 826 - 834.
- [5] Bhushan K, Suryawanshi, Prajitsen G & Damle (2013), Review of Design of Hybrid Aluminum/Composite Drive Shaft for Automobile. *International Journal of Innovative Technology and Exploring Engineering* 2(4), 259-266.
- [6] Amol B, Rindhe & Waugh S R (2014), Failure analysis and evaluation of a composite material automotive driveshaft by using FEM. *International journal of Robotics Research India* 3(2), 353 – 358.
- [7] Palani S, Alagu sundara pandian, John Stephen R, Suresh K & Shanmugan S (2018), Study of mechanical properties of treated coir sheath by epoxy resin. *International Journal of Pure and Applied Mathematics* 119 (15), 1091-1096.
- [8] Suresh K, John Stephen R, Palani S & Shanmugan S (2018), Power generation system using wastage energy in automobile vehicles. *International Journal of Pure and Applied Mathematics* 119(15), 1059-1071.
- [9] Shanmugan S, Selvaraju P & Palani S (2018) Exploration of Device in Mechanical Properties - Treated Coir Sheath by Epoxy Resin expenditure Fuzzy Logic Rule. *International Journal of Engineering & Technology* 7 (2.24), 567 – 570.
- [10] Paullinga Prakash R, Palani S, Vijaya Kumar D, ArunKumar S, & Shanmugan S (2017), Flow Behavior Analysis of Injection Mixer for CNG Engines using Computational Fluid Dynamics. *International Journal of Vehicle Structures & Systems* 9(5) 1-7.
- [11] Logesh M, Palani S, Shanmugan S, Selvam M & Harish A (2017), Finite Element Modelling of Bi-Material Interface for Crack Growth Evaluation technical Note. *Int. J. Vehicle Structures & Systems* 9(5), 273-275.